


SSTCG Features 導熱膏之特性

- 優異的導熱性 / EXCELLENT THERMAL CONDUCTIVITY
- 容易施工、穩定性高 / EASY HANDLING AND HIGH STABILITY
- 不會輕易乾硬 / NOT EASY TO DRY OUT AND HARD

Applications 產品運用端

- NB / PC / Tablet PC
- Autotronics
- Telecommunication
- LED lighting
- Power supply
- LCD TV
- Audio and video components
- Servers / Workstations / Infrastructure
- Mobile phone / GPS navigation and other portable devices

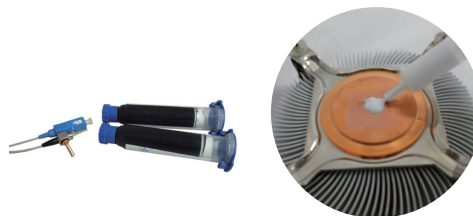

規格	測試方式 / 描述	單位	SSTCG
比重 Specific Gravity(25°C)	ASTM D792	-	2.3
熱傳導率 Thermal conductivity (Vertical)	ASTM D5470	W/mK	2~5
工作溫度 Operating Temperature	-	°C	-40~150
體積阻抗 Volume Resistivity	ASTM D257	Ω-cm	$>10^{12}$
RoHS, Halogen Free	SGS test	-	Pass
出貨標準尺寸	罐裝	KG	1 (可客製)